

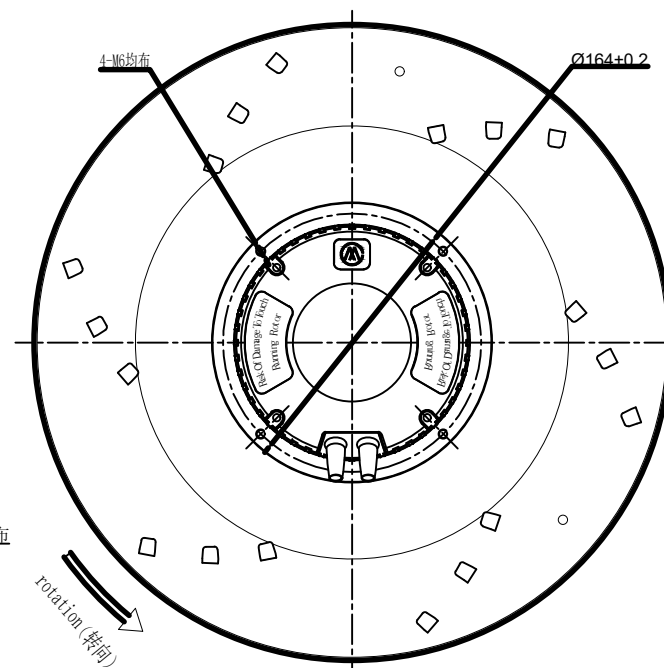
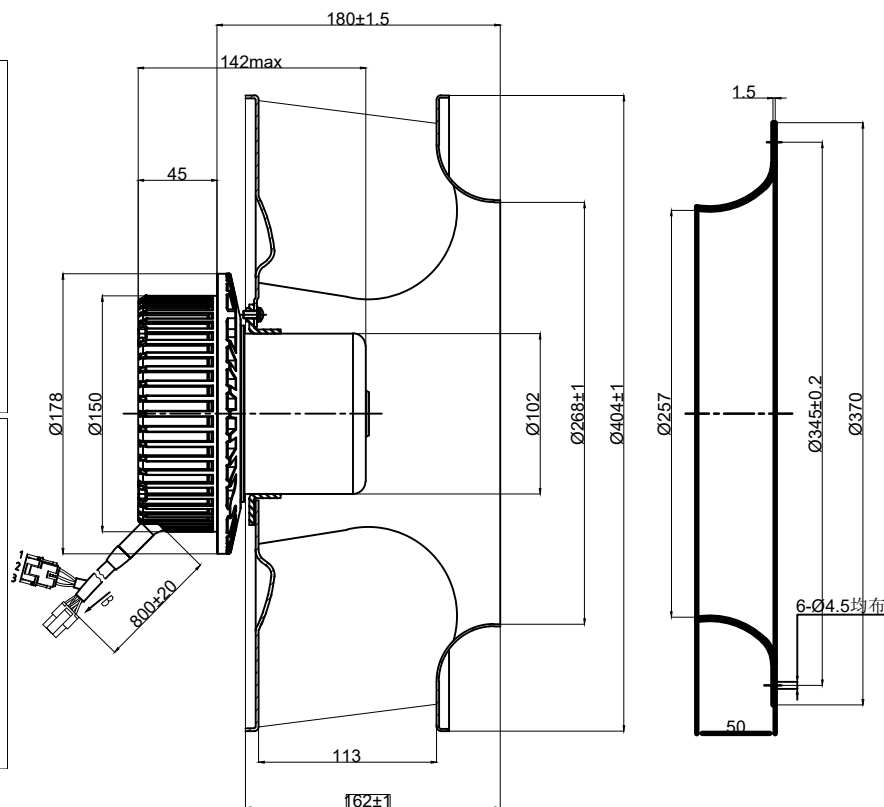
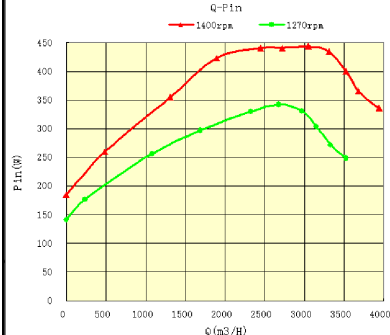


Pattern codes

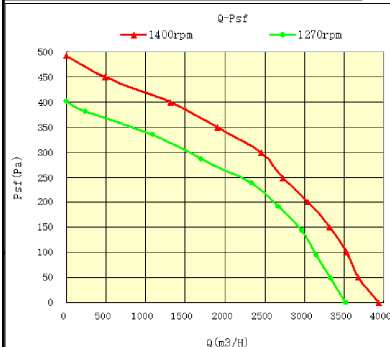


SPecification

1. BLDC centrifugal fan type (无刷直流离心风机): FLH400/113B-2233-301-10
2. Impeller material (叶轮材质): sheet aluminium (铝合金)
3. Inlet nozzles (导风圈): Galvanised sheet steel (镀锌钢板)
4. Duty (工作制): continuous (连续)
5. Rated voltage (额定电压): 230AC 50/60Hz
6. Rotation (转向): CW (Viewed from rotor) (从转子方向看顺时针)
7. Bearing (轴承): ball bearing (球轴承)
8. Dielectric strength (介电强度): 1500VAC 1min 10mA
9. Operation temperature (环境温度): -20℃~+30℃
10. Storage temperature (储存温度): -25℃~+60℃
11. Protection class (防护等级): IP20
12. Insulation class (绝缘等级): B
13. EMC interference emission: EN61000-6-4
interference immunity: EN61000-6-2
Harmonic: DIN EN61000-3-2/3
14. Totaly electronic protection (电子保护): Yes
15. Balance (平衡等级): G2.5

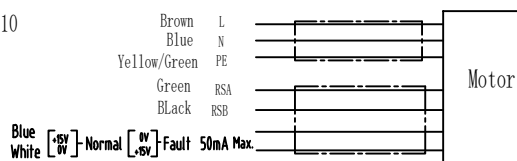

1	Brown
2	Blue
3	Yellow/Green



Point 1

Rated Voltage	Frequency	Static Pressure	Air flow	Speed	Power input
VAC	Hz	Pa	m³/H	r/min	W
230	50/60	240	2333	1270	330

Point 2

Rated Voltage	Frequency	Static Pressure	Air flow	Speed	Power input
VAC	Hz	Pa	m³/H	r/min	W
230	50/60	320	2333	1400	435

						CHANGZHOU XIANGMING INTELLIGENT DRIVE SYSTEM CORPORATION	
						FLH400/113B-2233-301-10	
						C O D E	
MARK	REVISE	PARTITION	REVERSION	SIGNATURE	DATE	Pattern codes	
DESIGNER			APPROVED				
CHECKED			STAGEMARK	WEIGHT	SCALE		
CRAFT			A		1:2.5		
STANDARD			TOTAL 1 PAGES		NO. 1 PAGE		NOTE