
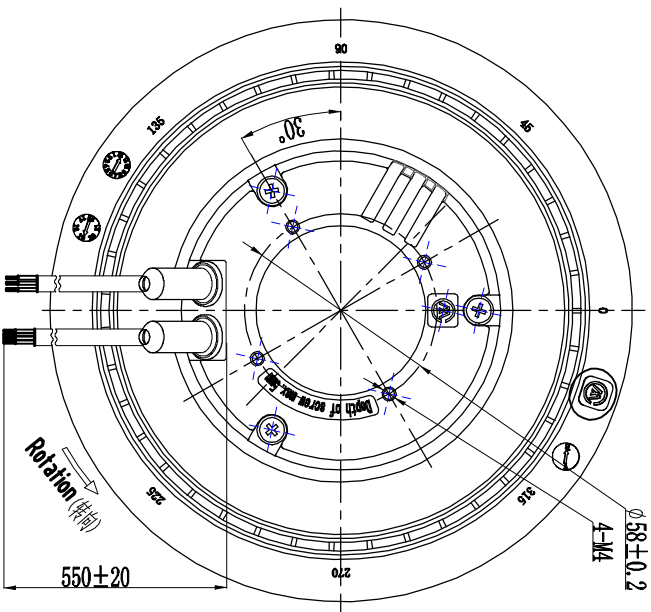
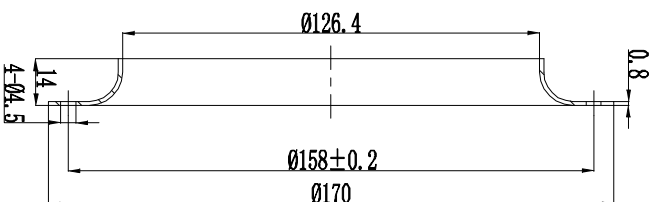
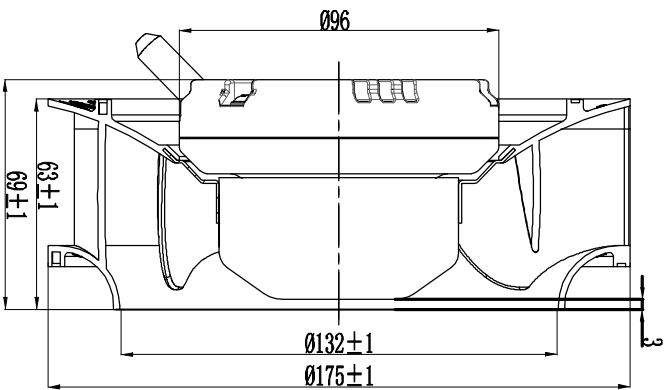
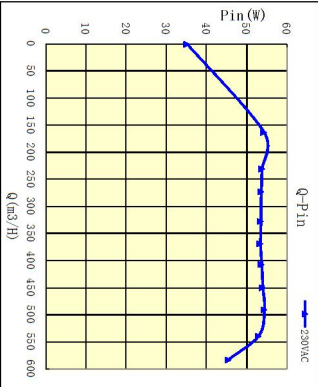


XM 26T 3MW3

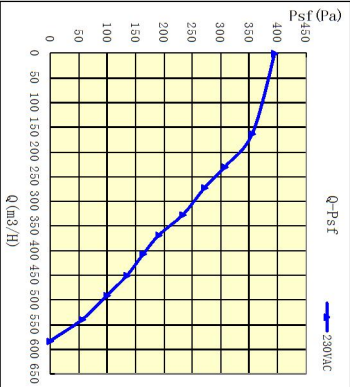

技术参数 (Specification)

1	额定电压 (Rated Voltage)	230 (VAC)
2	电压范围 (Voltage Range)	230±10% (VAC)
3	转速 (speed)	3200±5% (r/min)
4	功率 (power)	45±15% (W)
5	转速信号输出 Tach Pulse Output	2 pulse/rev
6	旋转方向 Rotation	CM (see from rotor)
7	绝缘等级 Insulation class	B级 (Class B)
8	工作制 Duty cycle	连续 (Continuous)
9	运行环境温度 Ambient temp	-25℃ ~ +60℃
10	防护等级 Protected Class	IP55
11	动平衡 Dynamic balance	G6.3
12	电子保护 Electronic Protected	有 (Yes)
13	电磁兼容 EMC	EN55014-1
	抗干扰度 (Immunity)	EN55014-2
	谐波 (Harmonics)	EN61000-3-2/3

电源线 (AC Power Cable)

NO.	Colour (颜色)	Definition (定义)	Gauge (线规)
1	棕 (brown)	L	UI 2x0.4
2	蓝 (blue)	N	20AWG
3	黄/绿 (Y/G)	PE	

控制线 (Control Cable)

NO.	Colour (颜色)	Function (功能)	Gauge (线规)
1	红 (red)	+10Vdc output	UI 2x0.4
2	蓝 (blue)	GND	22AWG
3	黄 (yellow)	0~10Vdc/PWM	22AWG
4	白 (white)	FG	



铭牌 (LABEL)



序号	物料编码	图样代号	物料名称	数量	单位	规格	备注
			常州祥明智能动力股份有限公司				
设计	王尧斌	分区	更改单号	签名	日期		物料编码:
审核		批次	重量	比例			规格:
工艺		A		1:1			备注:
标准化		共 1 张	第 1 张				