

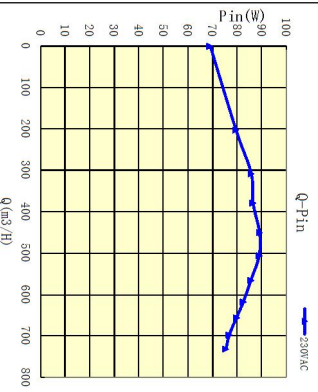
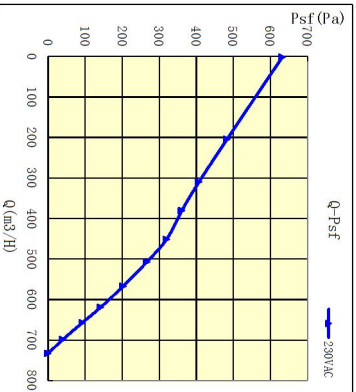
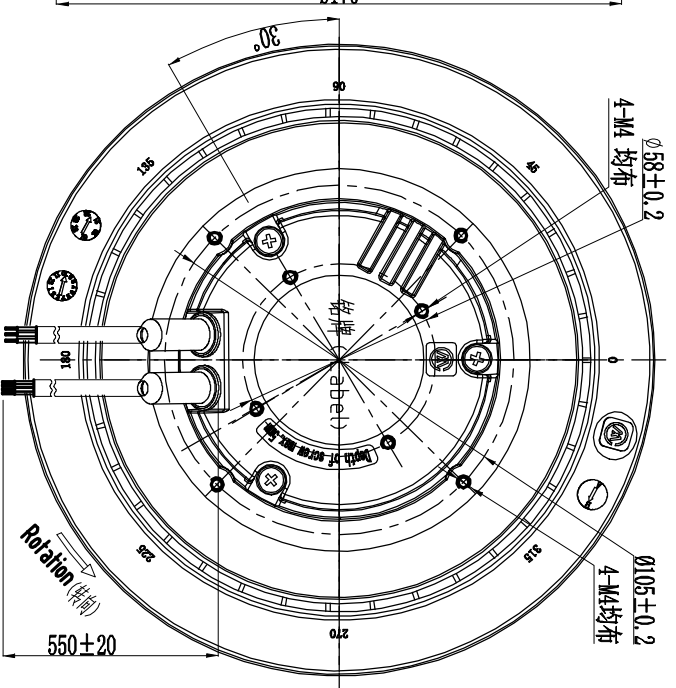


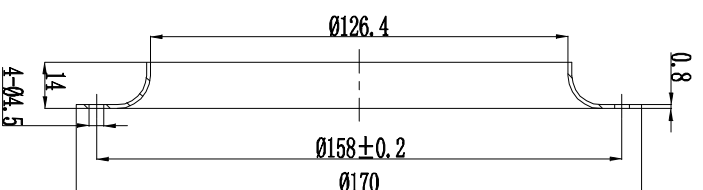

技术参数(Specification)

1	额定电压 (Rated Voltage)	230 (VAC)
2	电压范围 (Voltage Range)	220±10% (VAC)
3	转速 (speed)	3300±5% (r/min)
4	功率 (power)	83±15% (W)
5	转速信号输出 Taach Pulse Output	2 pulse/rev
6	旋转方向 Rotation	CW (see from rotor)
7	绝缘等级 Insulation class	B级 (Class B)
8	工作制 Duty cycle	连续 (Continuous)
9	运行环境温度 Ambient temp	-25℃ ~ +60℃
10	防护等级 Protected Class	IP55
11	动平衡 Dynamic balance	G6.3
12	电子保护 Electronic Protected	有 (Yes)
13	电磁兼容 EMC	EN55014-1
	谐波 (Harmonics)	EN55014-2

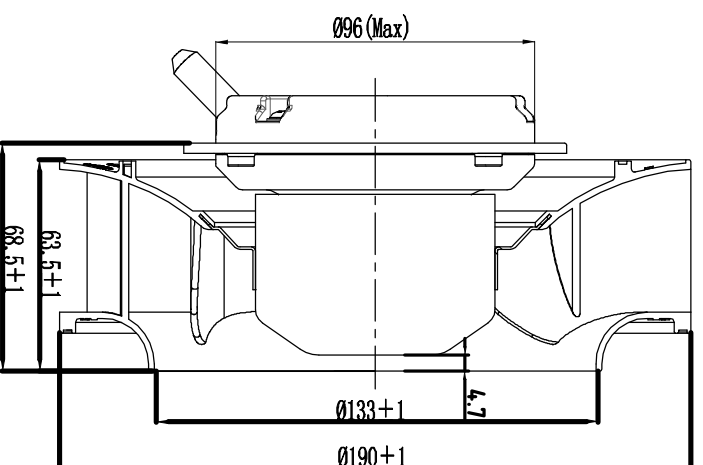

电源线 (AC Power Cable)			
NO.	Colour (颜色)	Definition (定义)	Gauge (线规)
1	棕(brown)	L	UL246-
2	蓝(blue)	N	20AWG
3	黄/绿(Y/G)	PE	

No.	Colour (颜色)	Function (功能)	Gauge (线规)
1	Red (red)	+10Vdc output	UL246
2	Blue (blue)	GND	
3	Yellow (yellow)	0~10Vdc PWM	
4	White (white)	FG	



火线(L)	230VAC	~	Brown		
零线(N)			Blue		
地线(PE)	⊕		Yellow/Green		
(0~10Vdc/PMW)			黄(Yellow)		
Speed setting			蓝(Blue)		
GND			白(White)		
PG.2 Pulse/rev)					

序号	物料编码	图样代号	物料名称	数量	单位	规格	备注
			 湖州祥明智能动力股份有限公司				
标记	处数	分区	更改单号	签名	日期	物料编码:	
设计	王晓斌		批准			FHJ90/045D-2231W-2-A07	
审核			版次	重量	比例	规格:	
工艺			A		1:1		
标准化			共 1 张	第 1 张	备注:		