
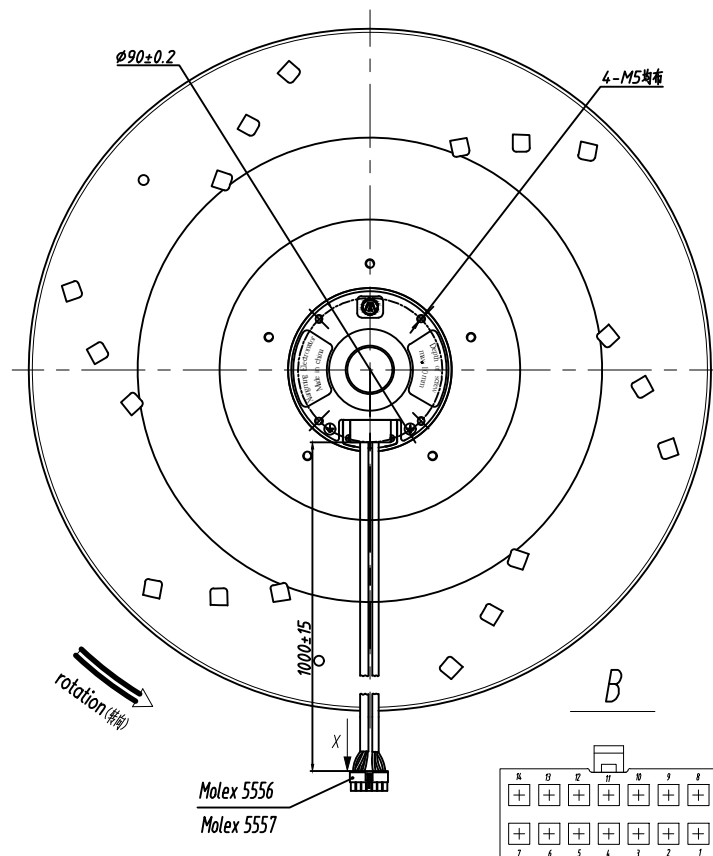

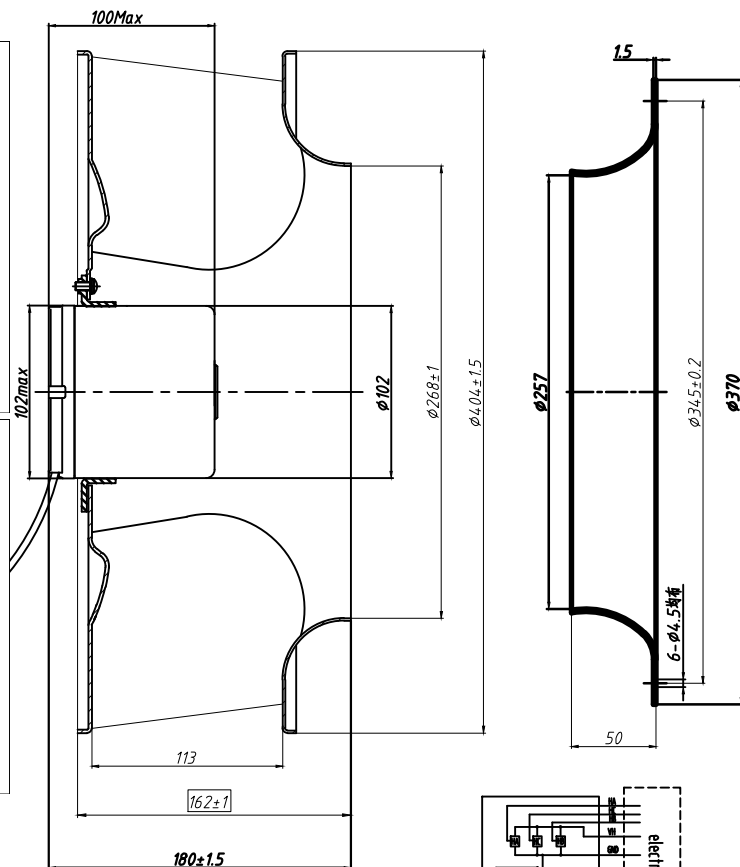


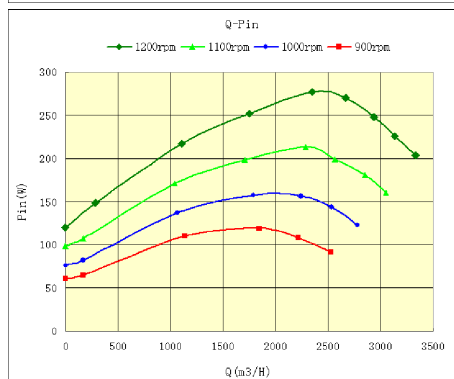

1. BLDC Centrifugal fan type (直流无刷离心风机型号): FLH4.00/113B-2213HT05
2. Impeller material (叶轮材质): sheet aluminium (铝合金)
3. Inlet nozzles (导风圈): Galvanised sheet steel (镀锌钢板)
4. Duty (工作制): Continuous (连续)
5. Rated voltage (额定电压): 230VAC 50/60Hz (400VDC Suplier from controller)
6. Rotation (转向): CW (Viewed from rotor) (从转子方向看顺时针)
7. Bearing (轴承): ball bearing (球轴承)
8. Operating temperature (工作温度): -25℃~+40℃
9. Storage temperature (储存温度): -25℃~+90℃
10. Type of protection (防护等级): IP20
11. Insulation class (绝缘等级): B
12. Balancing accuracy (平衡等级): G2.5

Pin No	AWG	Cable Color	Description
1	22	Red (红)	VH
2	22	Brown (棕)	H2
3	22	Black (黑)	GND
8	22	Orange (橙)	H3
9	22	Yellow (黄)	H1
10	22	Blue (蓝)	TO
6	20	Black (黑)	U
12	20	Blue (蓝)	W
4	20	Brown (棕)	V
11	20	Red/Green (黄绿)	PE

						常州祥明智能动力股份有限公司																	
												FLH400/113B-2213HT05											
标记	处数	分区	更改文件号	签名	年月日																		
设计			标准化			阶段标记			质量	比例	FLH400/113B-2213HT05												
										1:1													
审核																							
工艺			批准			共 张			第 张														